



Assembly Instructions

For Guard Rail
Toddler Bed Conversion

Model shown is example only. Styles may vary

Furniture Care Instructions

Room Climate Control

Wood, when first cut contains more than 50 percent water. When it is prepared for furniture construction it is placed in a Kiln and the moisture content is brought down to 8 to 10 percent. Wood is porous and responds to its environment. If the room has high humidity it will absorb it and expand and if the humidity is low it will lose moisture and shrink.

It is important that the humidity levels in the room be controlled from extremes of too much humidity or too little. Furniture should not be placed close to air-conditioning outlets, fire places, radiators, space heaters, humidifiers or dehumidifiers. Exposure to extreme variations of temperature and humidity can damage any fine wood product.

The Ideal Environment for Fine Furniture

Fine wood furniture will have fewer problems when its environment is controlled at a temperature between 65 and 75 degrees and a relative humidity between 35 and 40 percent. Wood placed in an environment outside of those limits can and will shrink or expand and may develop some small cracks which are not material or structural defects.

Sticking Doors and Drawers

With the minor changes in temperature and humidity doors and drawers may swell and be difficult to open or close. Tolerances have been built into the units but extreme conditions may still cause sticking. This will adjust back to normal over time but until it does consider using a dehumidifier or rub candle wax or paraffin on the sides that stick.

Avoid Direct Sunlight

Keep the furniture out of direct sunlight. Ultraviolet rays will fade colors and in some cases darken them. It can also cause crazing or hair line cracks in the finish. White finishes will yellow naturally over time and exposure to direct sunlight will hasten this natural process along with some woods darkening naturally over time; this is not considered to be a quality defect.

Proper Storage

If you need to put your furniture in storage for any period of time do not store them in a damp basement or hot dry attic. Allow air movement around the furniture and do not stack anything on it.

In General

- Protect furniture surface from hot or extremely cold items.
- Use coasters under hot or cold beverages
- Do not use synthetic fabric under accessories or lamps
- Protect tops from pens, markers and crayons
- Oils from potpourri and other scented items can damage the furniture finish.
- Do not drag items across the surface of the furniture.
- Allow the surface to breath by rotating your accessories and lamps.
- Do not over polish the furniture, do it only two or three times a year. Over polishing can distort the natural finish of the product.
- Do not wax the furniture as wax build up can destroy the natural finish of the product.
- When moving furniture always lift the unit. Do not push or drag it to avoid damage to legs
- Keep the furniture level so doors and drawers open and close freely.
- Clean with a damp, not wet, cloth. Use only a mild soap. Do not use abrasive cleaners.

STOP

**IF YOU EXPERIENCE ANY
ISSUES WITH THIS PRODUCT**

**BEFORE YOU
RETURN THIS TO
THE RETAILER**

**PLEASE FOLLOW
PROCEDURES ON THE
REVERSE SIDE OF THIS FORM.**

Product Assistance Procedures

You have purchased a quality piece of furniture. Our international team has spent many hours designing and engineering this piece and packaging to ensure you will be satisfied with your purchase. But if for any reason you need help with your purchase please contact us at any time.

Procedures to follow should you have any questions:

For best and most timely service please contact us by e-mail at info@lajobi.com

Please provide the following information in your e-mail.

1. Your Name _____
2. Address _____

3. Phone number _____
4. Place and date of purchase _____

5. Item number and description of your product. _____

The item number can be found on the back of the case or on the foot/headboard of the crib. Please include all numbers found on that label including the PO# and production date.

6. Short description of the issues and attach a photo if possible.

Someone will contact you via e-mail or phone to help you with your issues.

If you do not have internet access, please fax the above information to 609-409-5809

If you do not have internet or fax access, please call us at 888-266-2848 and be sure to have all the above information ready to give to your Client Service Specialist.



WARNING!

For Toddler Bed Use


- FAILURE TO FOLLOW THESE WARNINGS AND ASSEMBLY INSTRUCTIONS COULD RESULT IN SERIOUS INJURY OR DEATH FROM ENTRAPMENT OR STRANGULATION.
- DO NOT PLACE BED NEAR WINDOWS WHERE CORDS FROM BLINDS OR DRAPES MAY STRANGLE A CHILD.
- THE MATTRESS INTENDED FOR USE ON THE BED SHALL BE A FULL-SIZE CRIB MATTRESS HAVING THE DIMENSIONS OF 51-5/8 in. (1310 mm) IN LENGTH AND 27-1/4 in. (690 mm) IN WIDTH AND THICKNESS OF 4 in. (100mm) OR A GREATER THICKNESS AS SPECIFIED BY THE MANUFACTURER.
- THE MINIMUM AGE OF THE INTENDED USER SHALL NOT BE LESS THAN 15 MONTHS AND THE MAXIMUM WEIGHT SHALL NOT BE GREATER THAN 50 LBS. (22.7 KG).

Thank you for choosing a LaJobi Product. To ensure the best performance from your crib, please read the following instructions carefully.

Carefully remove and lay out all parts. Familiarize yourself with all exhibits and diagrams to facilitate the assembly of your guard rail.

Please call Lajobi with any comments or questions, Do not return to retailer.


TOOLS REQUIRED: Allen wrench (supplied)




PARTS ENCLOSED IN CARTON

Model shown is example only. Styles may vary

A (1) Guard Rail

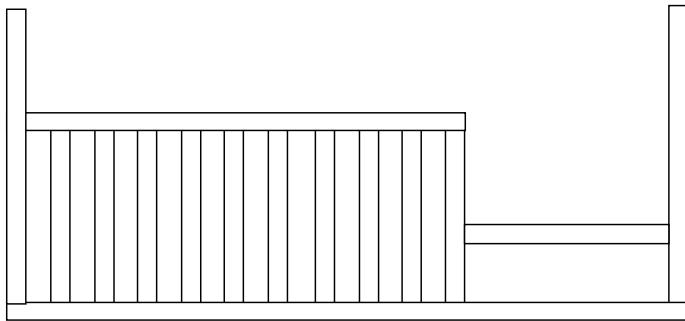


B (2) 1-1/2" Flathead Machine Screws



CARE & MAINTENANCE

WHEN CLEANING YOUR CRIB, USE A NON-TOXIC, NON-ABRASIVE CLEANER. MIX A SOLUTION OF WATER WITH A SMALL AMOUNT OF A MILD DISHWASHING LIQUID. APPLY TO CRIB SURFACE WITH A SOFT DAMP CLOTH LIGHTLY DAMPENED IN SOLUTION. AFTER CLEANING, DRY COMPLETELY WITH A SOFT DRY CLOTH.


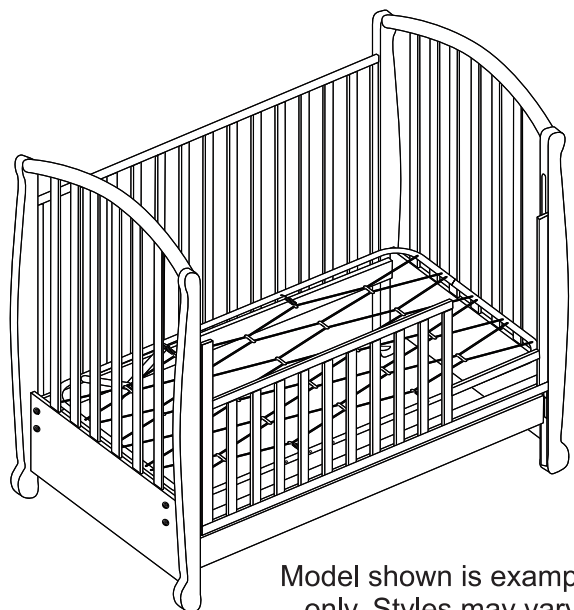


Model shown is example only. Styles may vary

STEP 1 Instructions to Remove Drop Side Rail

Model shown is example only. Styles may vary

Figure 1:

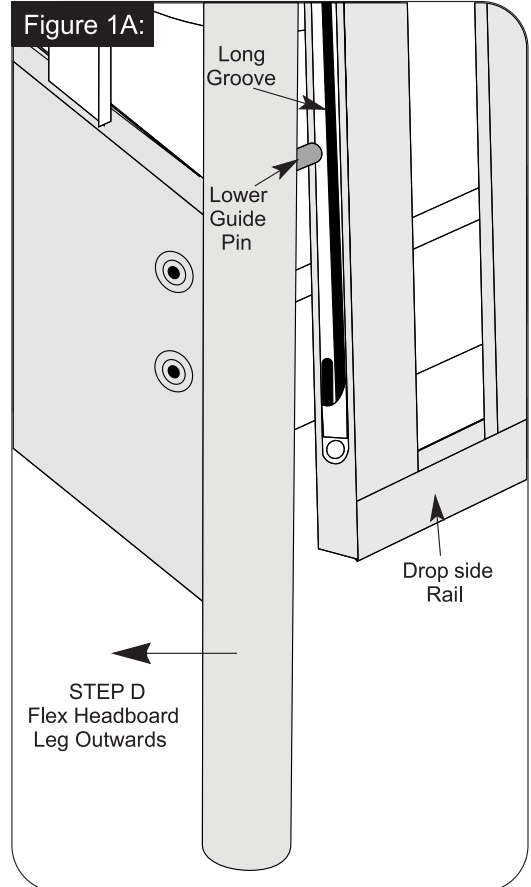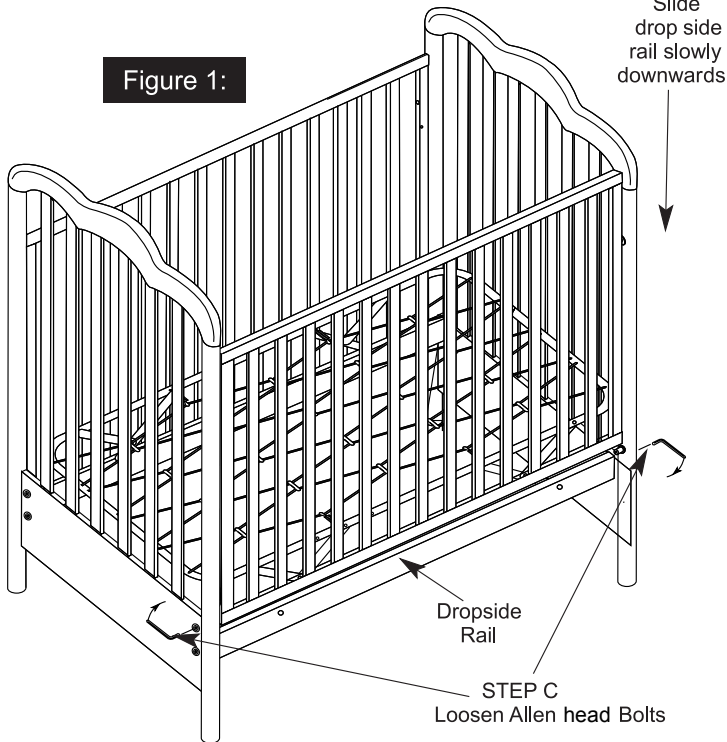

A. WITH THE CRIB UPRIGHT, REMOVE THE DRAWER IF SO EQUIPPED.

B. RELEASE DROP SIDE RAIL TO BOTTOM POSITION.


C. LOOSEN THE ALLEN HEAD BOLTS ON BOTH HEADBOARDS NEAREST THE DROP SIDE RAIL. **NOTE:** SOME MODELS HAVE ONLY ONE (1) ALLEN HEAD BOLT AND SOME HAVE TWO (2) ALLEN HEAD BOLTS HOLDING THE STABILIZER BARS.

NOTE: IF YOU HAVE ANY DIFFICULTY ACCOMPLISHING THE DROP SIDE REMOVAL, PLEASE REFER TO THE ASSEMBLY INSTRUCTIONS SUPPLIED WITH YOUR CRIB.

D. CAREFULLY FLEX THE BOTTOM END OF THE HEADBOARD LEG OUTWARDS FROM THE DROP SIDE (FIGURE 1A) TO CREATE A GAP THE LOWER GUIDE PINS TO PASS THROUGH SO THAT THEY CAN BE REMOVED FROM THE LONG GROOVE OF THE PLASTIC LOWER TRACK.

E. TO DETACH THE DROP SIDE RAIL FROM THE CRIB, SLIDE DROP SIDE UPWARDS AND AWAY FROM YOU APPROXIMATELY AT A 30° ANGLE INTO THE BOTTOM OPENING OF THE METAL ON THE DROP SIDE AND DISENGAGE PLASTIC UPPER BUSHINGS OUT OF THE METAL TRACKS AND REMOVE THE DROP SIDE FROM THE CRIB (FIGURE 1B)

Figure 1B:

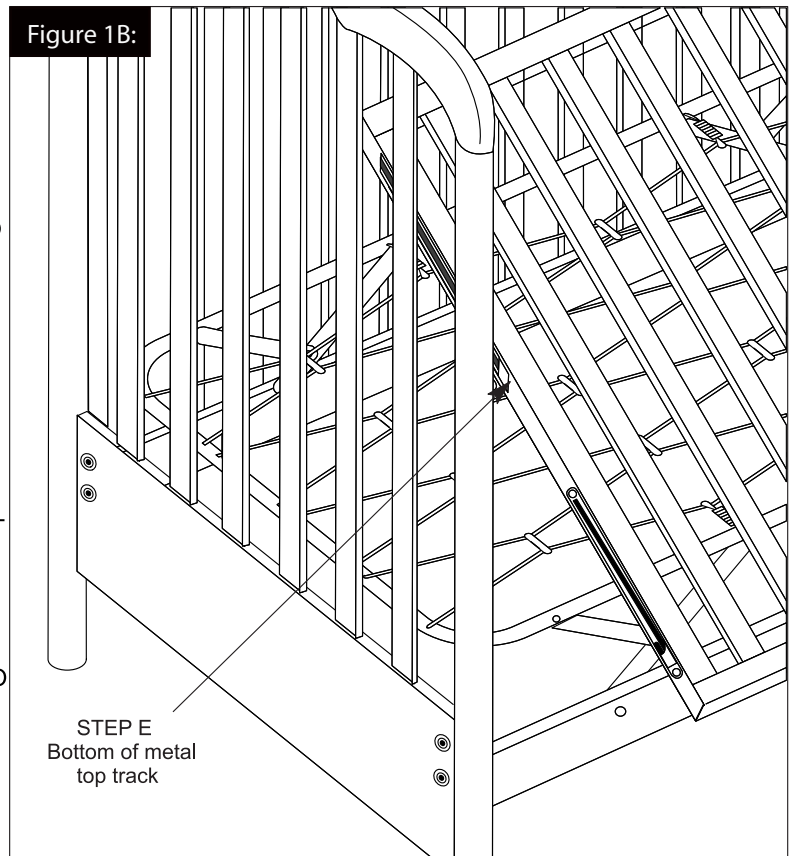

STEP 2 Guard Rail Installation (Toddler Bed)

THIS STEP REQUIRES:

(1) GUARD RAIL (A)

(2) 1-1/2" Flathead Machine Screws (B)



Model shown is example only. Styles may vary

Figure 2:


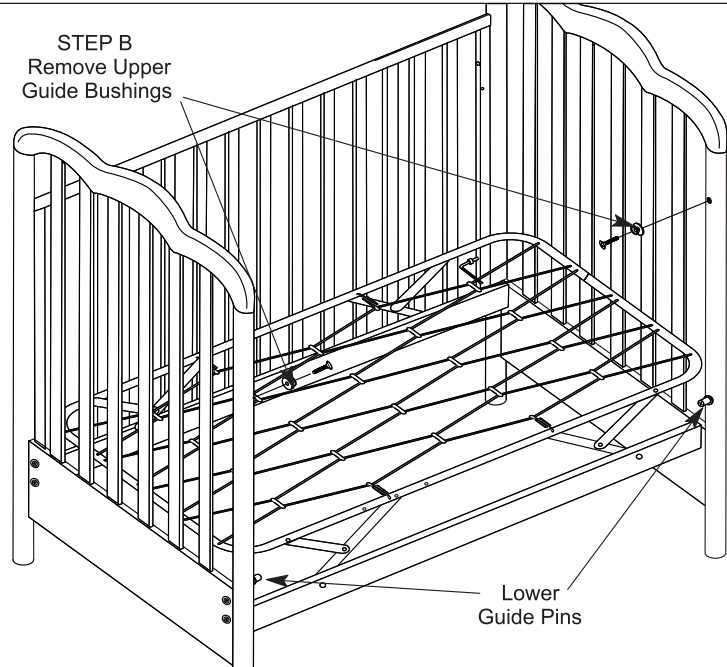


Figure 2A:

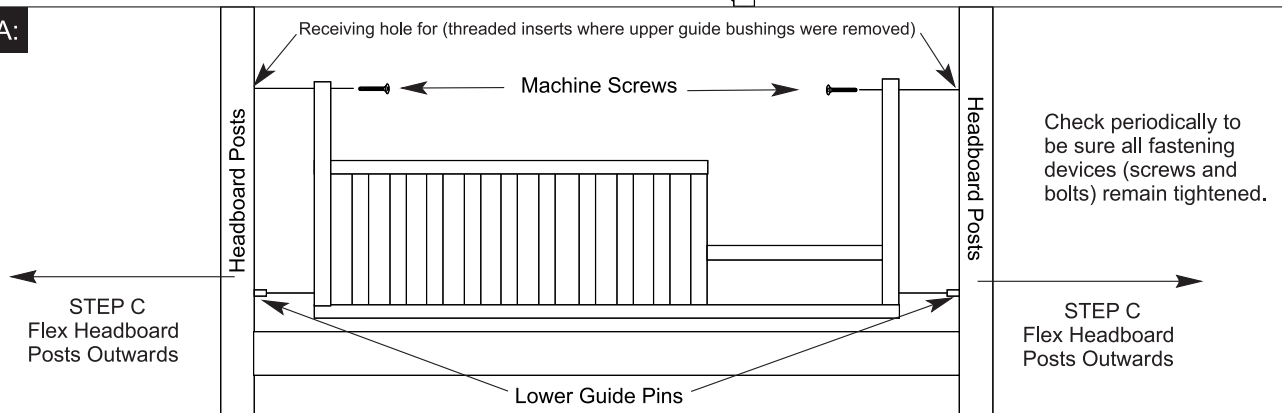

A. MAKE SURE THE MATTRESS SPRING IS IN THE LOWEST POSITION. (Figure 2) TO DO THIS, FIRST LOOSEN AND REMOVE EACH OF THE FOUR (4) 1-1/4" PHILLIPS HEAD SCREWS AND WING NUTS ATTACHED TO THE SPRING. EXTEND THE SPRING SUPPORT BRACKETS TO THE THIRD HOLE (REFER TO ATTACHING THE SPRING STEP IN CRIB INSTRUCTIONS). REATTACH THE SPRING BY INSTALLING THE PHILLIPS HEAD SCREWS AND WING NUTS. **NOTE:** TIGHTEN ALL HARDWARE SECURELY.

B. REMOVE THE TWO (2) UPPER GUIDE BUSHINGS FROM THE HEADBOARD AND FOOTBOARD POSTS BY UNSCREWING THE FLAT-HEAD MACHINE SCREWS (FIGURE 2).

⚠️ WARNING

WHEN REMOVED, IF SWALLOWED BY A CHILD, UPPER GUIDE BUSHINGS AND THE FLAT HEAD MACHINE SCREWS CAN BECOME A CHOKING HAZARD. PLEASE STORE THESE SMALL PARTS AWAY FROM CHILDREN IN A SAFE PLACE.

C. CAREFULLY FLEX THE BOTTOM END OF THE HEADBOARD LEG OUTWARDS (FIGURE 2A) TO CREATE A GAP FOR THE LOWER GUIDE PINS TO PASS THROUGH SO THAT THEY CAN BE INSERTED INTO THE ROUTED OPENINGS LOCATED IN THE BOTTOM OF THE GUARD RAIL OVER THE LOWER GUIDE PINS TO HOLD THE GUARD RAIL IN PLACE.

D. SECURE GUARD RAIL TO HEADBOARD POSTS BY INSERTING THE MACHINE SCREWS SUPPLIED WITH THE GUARD RAIL KIT IN THE TOP HOLES OF THE GUARD RAIL MOUNTING RAILS AND THE THREADED INSERTS IN THE HEADBOARD AND FOOTBOARD POSTS. TIGHTEN BOTH SECURELY.



257 Prospect Plains Road
Cranbury, NJ 08512
Phone: 888-266-2848, 609-409-2495
Fax: 609-409-5809